

# Outdoor silo

## With FullFlow system – that ensures high fodder quality

A silo, at its' core, may come across as a simple product – but then again not!

### A silo needs to meet a number of requirements:

- > A silo must be easy to install in accordance with the requirements and it has to be leveled.
- > The silo must continuously maintain a high level of hygiene.
- > The silo must be strong and robust.
- > The silo must be dimensionally stable at both high and low temperatures.
- > The silo must be easy to inspect and monitor.

A Tunetanken outdoor silo is of the highest quality. The silo is manufactured in fiberglass reinforced composite. A unique material also used in the manufacturing of highly strained products such as windmills, ships, airplanes, bridges etc. The material can also be reused.



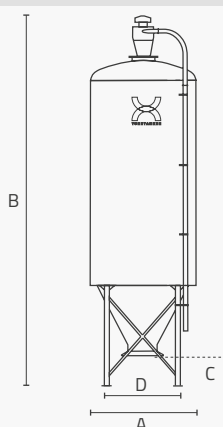
## Delivered with

- > Cyclone with ventilation hut.
- > Blow-in pipe and bending with a large radius.
- > Raincollar above outlet.
- > Clear or greywhite topcoat (RAL 9002).

**A Tunetanken silo is thought out with regard to installation - operation - maintenance - life time - environment.**

### Extra equipment:

Ventilation pipe. Sight stripe. Manhole. Electronic level indicator. Bottom outlet. Vibration motor etc.

Illustration	Type	Volume		Dimensions			
		Volume	Content <sup>1</sup>	Diameter (A)	Total height (B)	Free height <sup>2</sup> (C)	Distance (D)
	FC13	13 m <sup>3</sup>	8,4 t	2.400	6.100	540 / 520	1.690
	FC16	16 m <sup>3</sup>	10,4 t	2.400	6.760	540 / 520	1.690
	FC21	21 m <sup>3</sup>	13,7 t	2.400	7.860	540 / 520	1.690
	FC26	26 m <sup>3</sup>	16,9 t	2.400	8.970	540 / 520	1.690
	FC32	32 m <sup>3</sup>	20,8 t	2.400	10.420	540 / 520	1.690
	FC40	40 m <sup>3</sup>	26,0 t	3.000	9.300	540 / 520	2.110
	FC45	45 m <sup>3</sup>	29,3 t	3.000	10.000	540 / 520	2.110
	FC50	50 m <sup>3</sup>	32,5 t	3.000	10.750	540 / 520	2.110
	FC60	60 m <sup>3</sup>	39,0 t	3.000	12.130	540 / 520	2.110
	FC75	75 m <sup>3</sup>	48,8 t	3.000	14.255	540 / 520	1.500
	FC90	90 m <sup>3</sup>	58,5 t	3.000	15.900	540 / 520	1.500

\*All undefined measurements are in mm.

<sup>1</sup> Approx. amount of fodder in ton with a density of 650 kg/m<sup>3</sup>.

<sup>2</sup> Free height under the silo once a square flange 300 mm. / round flange Ø160 mm is mounted.